


Typical Dual Indirect System - Consumer Interface Unit Cabinet Dimensions

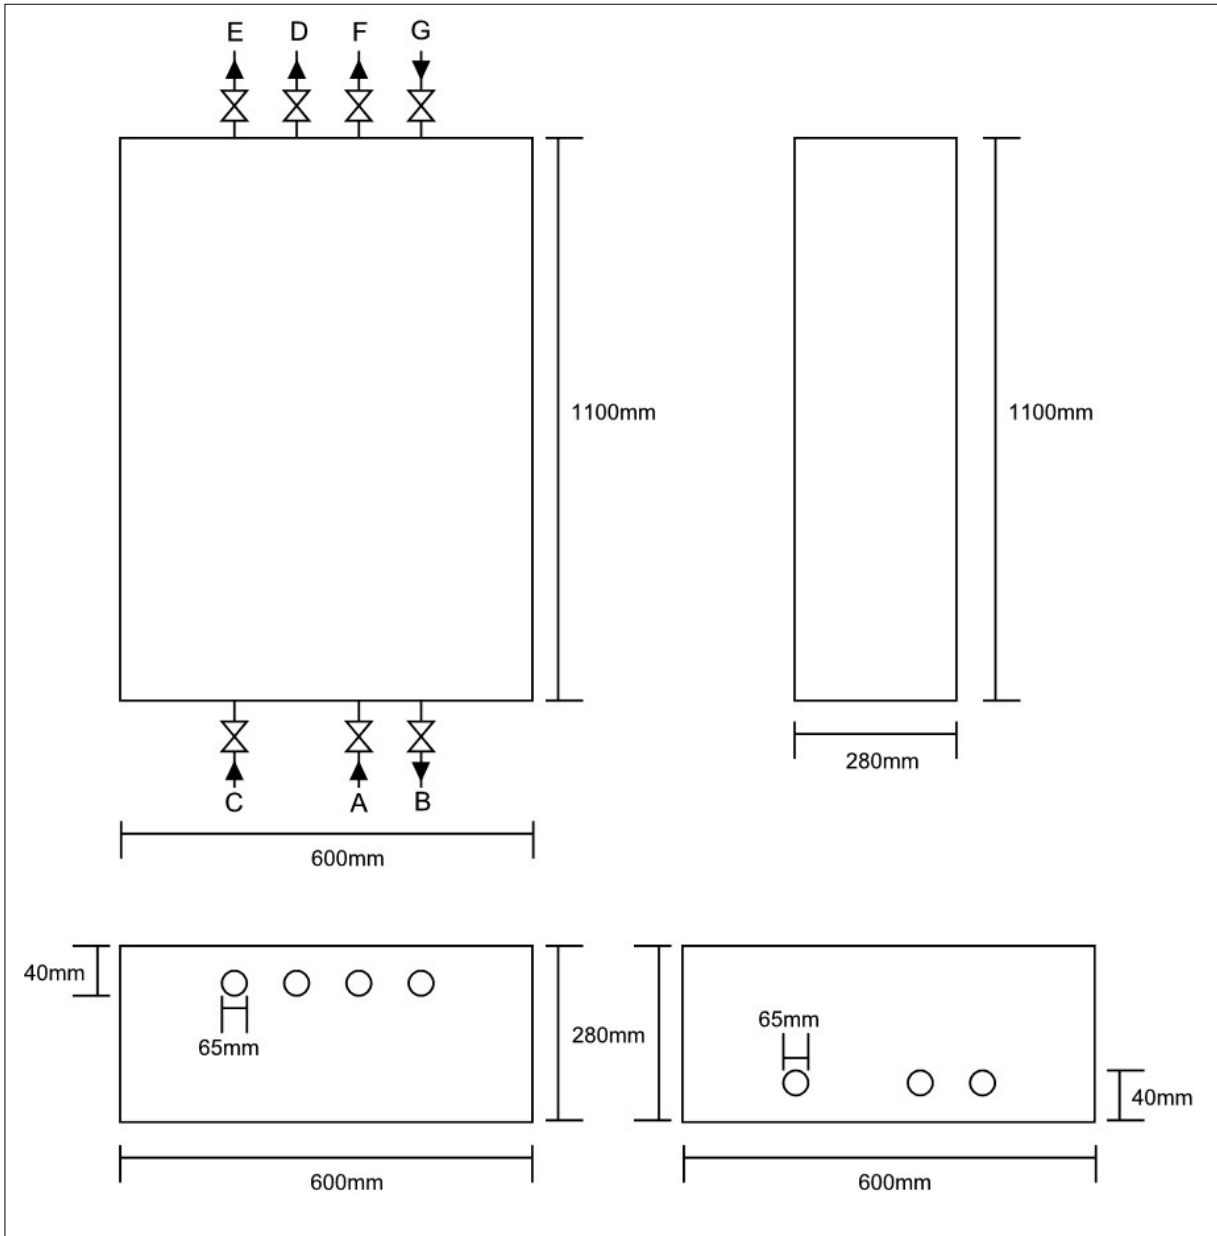

Surface Mounted Cabinet

White, polyester powder coated, RAL 9016
Dimensions: 600mm x 1100mm x 280mm (Width x Height x Depth)

Weight Without Cover: 35 Kg Weight With Cover: 42 Kg

Connections: 3/4" Isolating EPDM Ball Valves
(which can be sited internally or externally)

- A. Primary Heating Flow
- B. Primary Heating return
- C. Boosted Cold Water Supply In
- D. DHWS to Apartment
- E. Boosted Cold Water to Apartment
- F. Secondary Heating Flow
- G. Secondary Heating Return